


For engines up to 500 CID (8.2 liters) diesel and 1000 CID (16.4 liters) carbureted



- Simplified operation. Solid steel shaft transmits torque directly from air motor to inertia-type drive.
- Built-in/removable air strainer located within the inlet port is included as standard.
- Super torque seven blade rotor for increased starting power.

**Installation**

**TYPICAL NATURAL GAS ENGINE INSTALLATION**

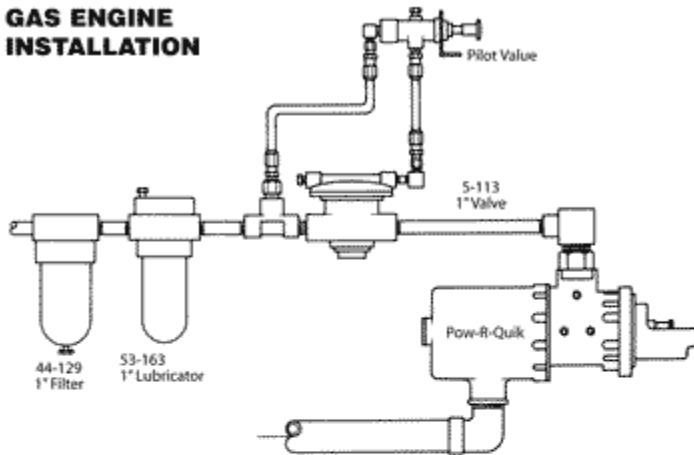

**TYPICAL DIESEL ENGINE INSTALLATION**

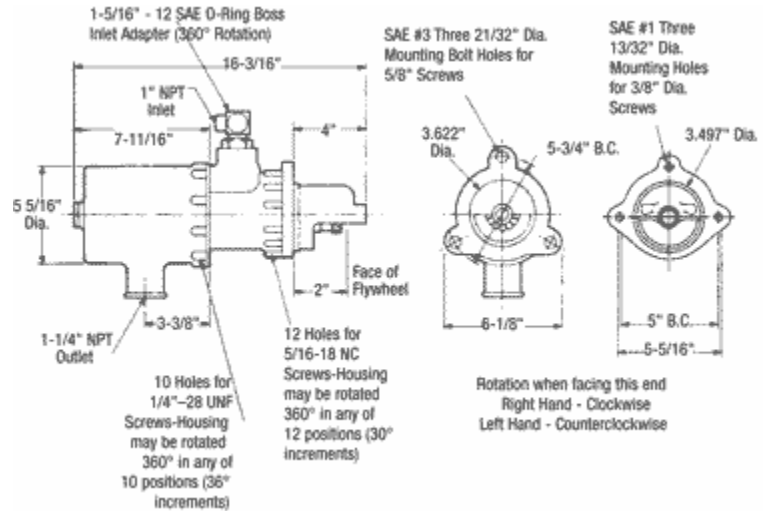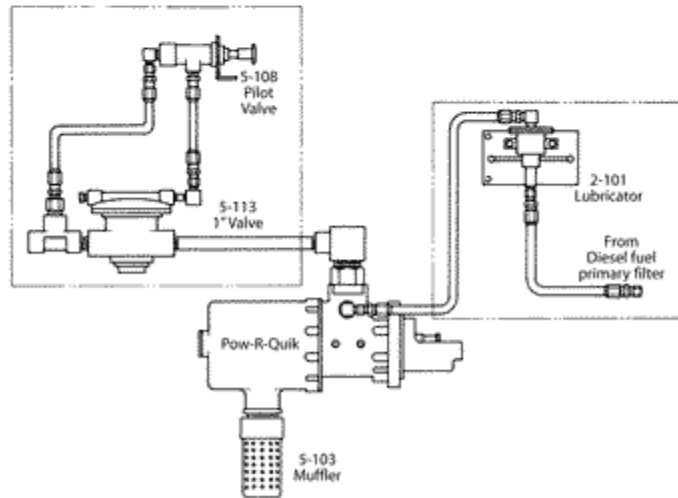

**Model LS-16 Inertia/Direct Drive  
Horsepower-Torque & Airflow  
vs  
Pinion Gear RPM**

