

Product Specifications


Rotation:	CW/CCW
Motor housing:	Aluminum
Pinion housing:	Aluminum
Barrel:	Ductile Iron
Piston:	Steel Alloy
Number of pistons:	7
Displacement:	1.35 in ³ /REV
Speed range:	0-7000 RPM
Drive type:	Inertia
Maximum working pressure:	3000 PSI
Duty cycle:	Intermittent
Maximum torque:	45 Ft-lbs
Weight:	17.0 lbs
Overall volumetric efficiency:	92%
Recommended fluid:	Red hydraulic fluid (MIL-H-5606)
Inlet Port:	SAE-8
Outlet Port:	SAE-8
Available Flanges:	SAE-1, SAE-2, SAE-3, SAE-4, Custom
Service Kit:	KT-207387
Barrell Kit:	KT-208827

B SERIES (CMA) HYDROTOR®


Revised August 2014




Flow vs. Speed

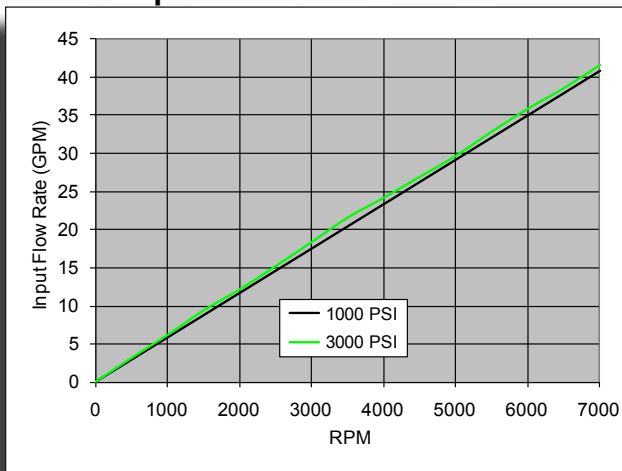

Torque vs. Speed

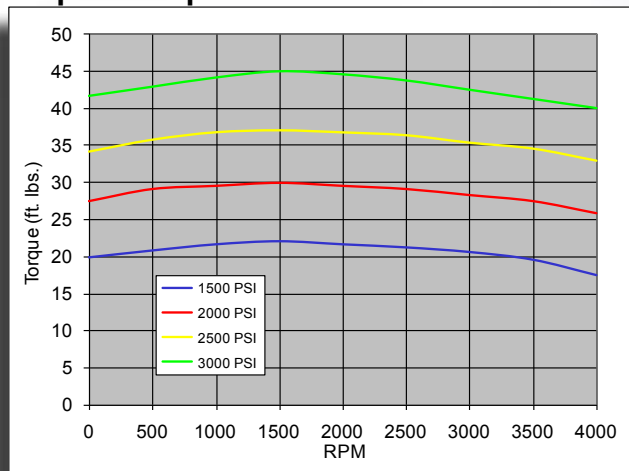

General Dimensions- Part # B1-11C2183-3A200 shown below

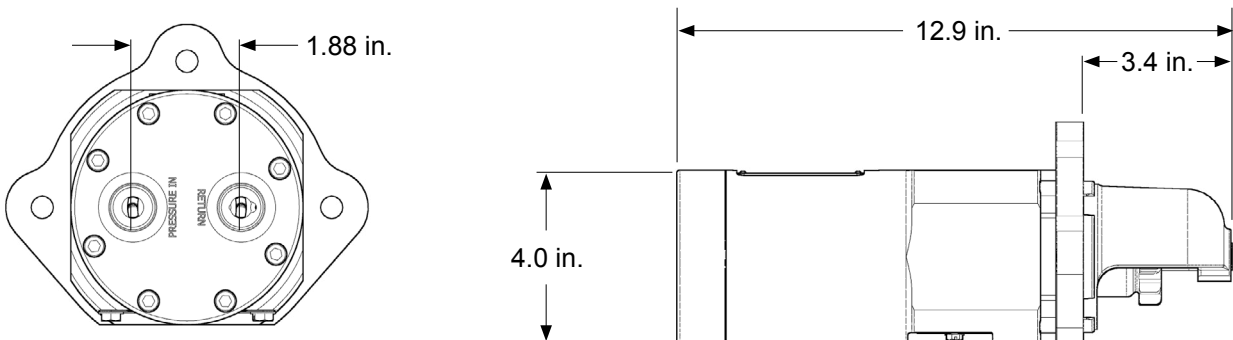

SS B11C2183_C